



# SPECIFICATION



.....	3
General Description .....	3
.....	3
.....	3
.....	4
.....	5
.....	7
.....	8
.....	11
.....	11
.....	12
.....	13
.....	14
.....	15
.....	15
.....	17
.....	17




## 1. Description


### 1.1

### 1.2 Features


### 1.3 Application



### 1.4 Package Dimension

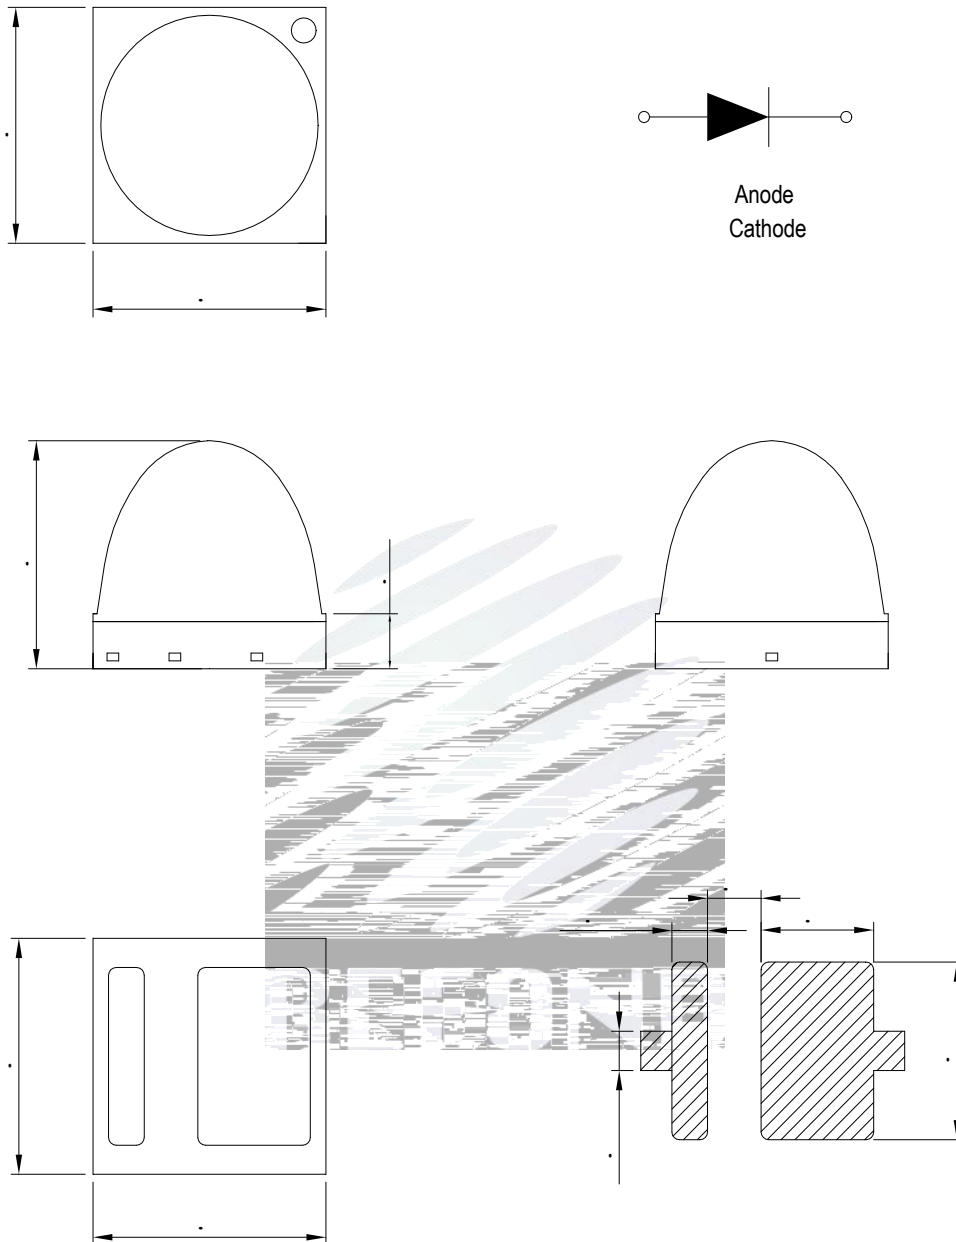

±




## 1.5 Product Parameters




### 1.6 Bin Range Of Forward Voltage and Luminous Flux (IF=350mA)


BIN (IF=350mA)

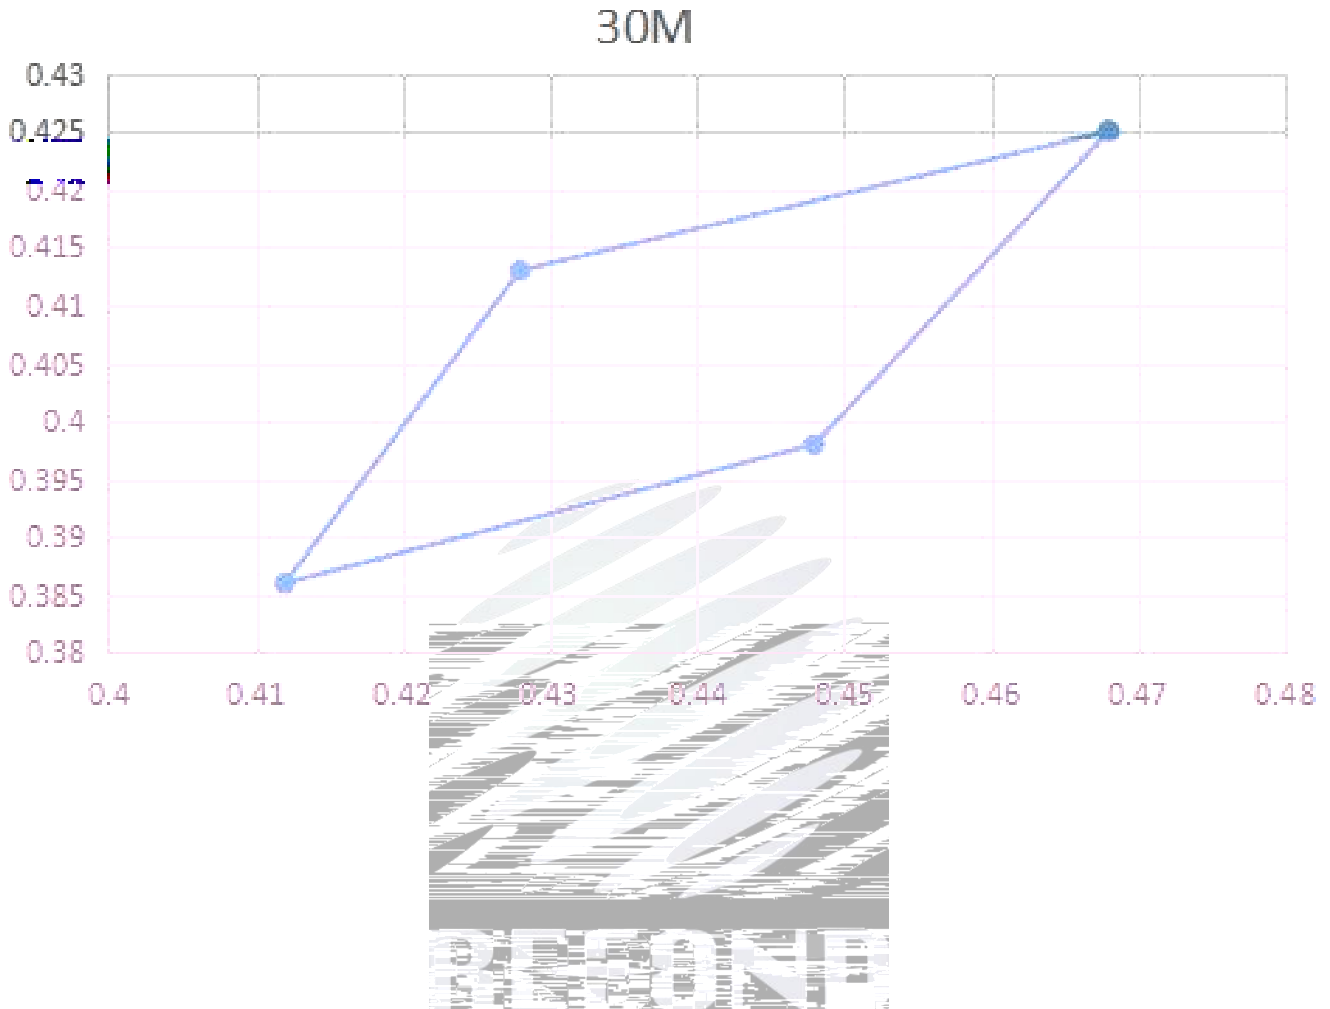

### Bin data




Bin Code	X1	Y1	X2	Y2	X3	Y3	X4	Y4
30M	0.468	0.425	0.428	0.413	0.412	0.386	0.448	0.398




### 1.7 Typical Optical Characteristics Curves

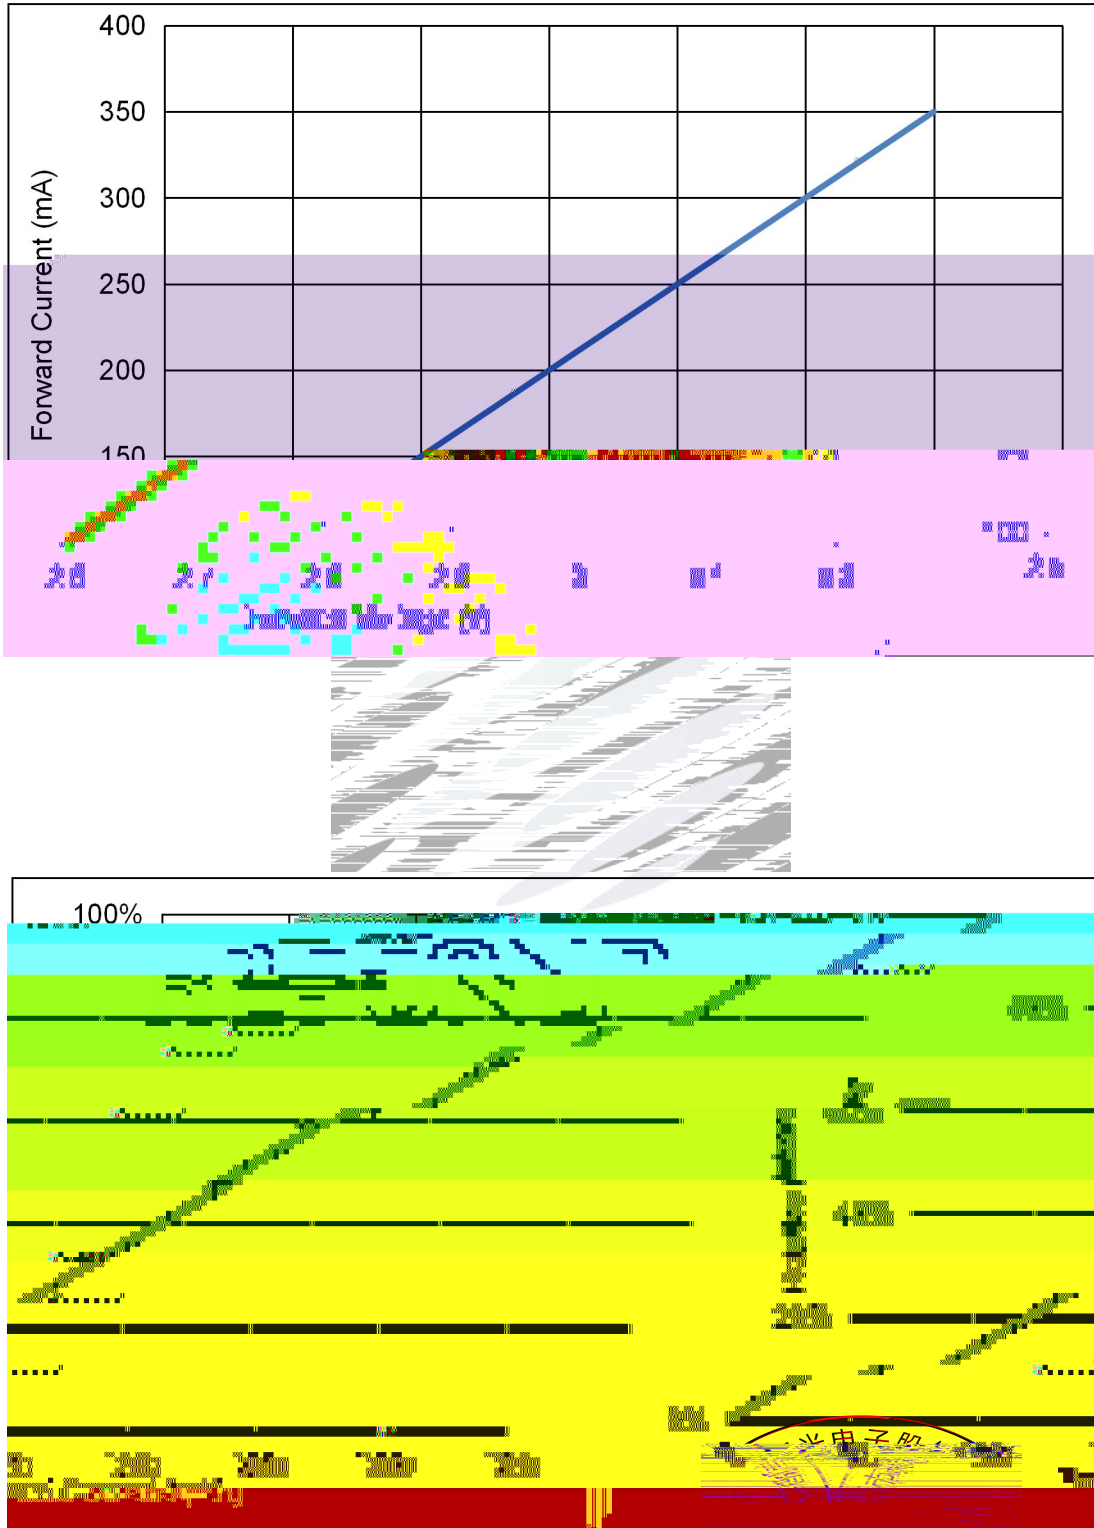

承认专用章



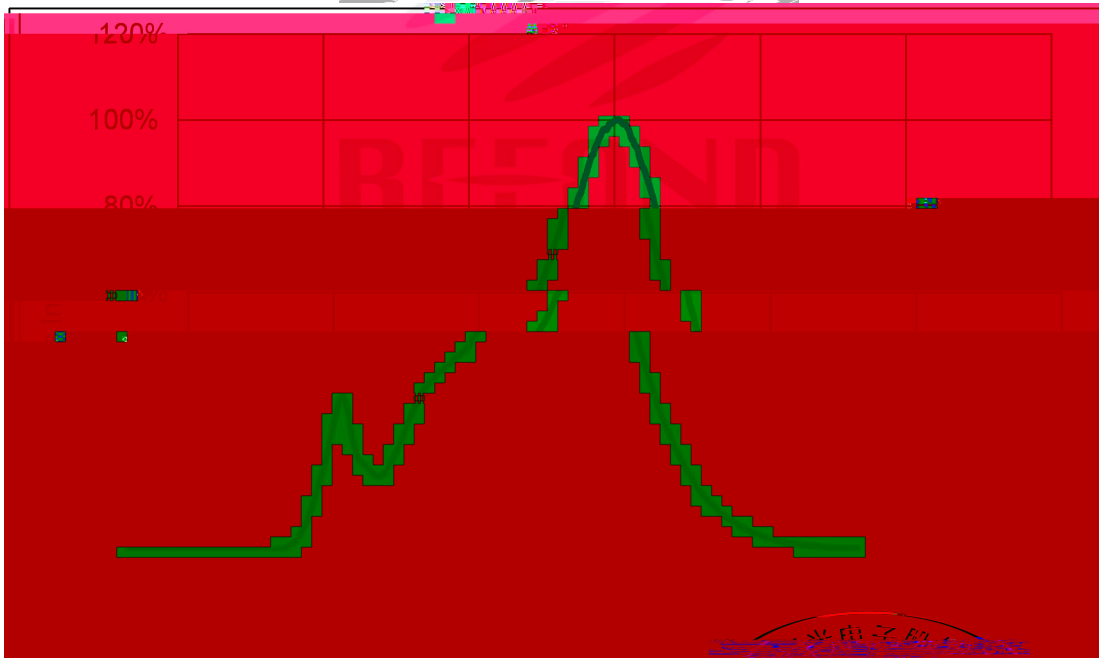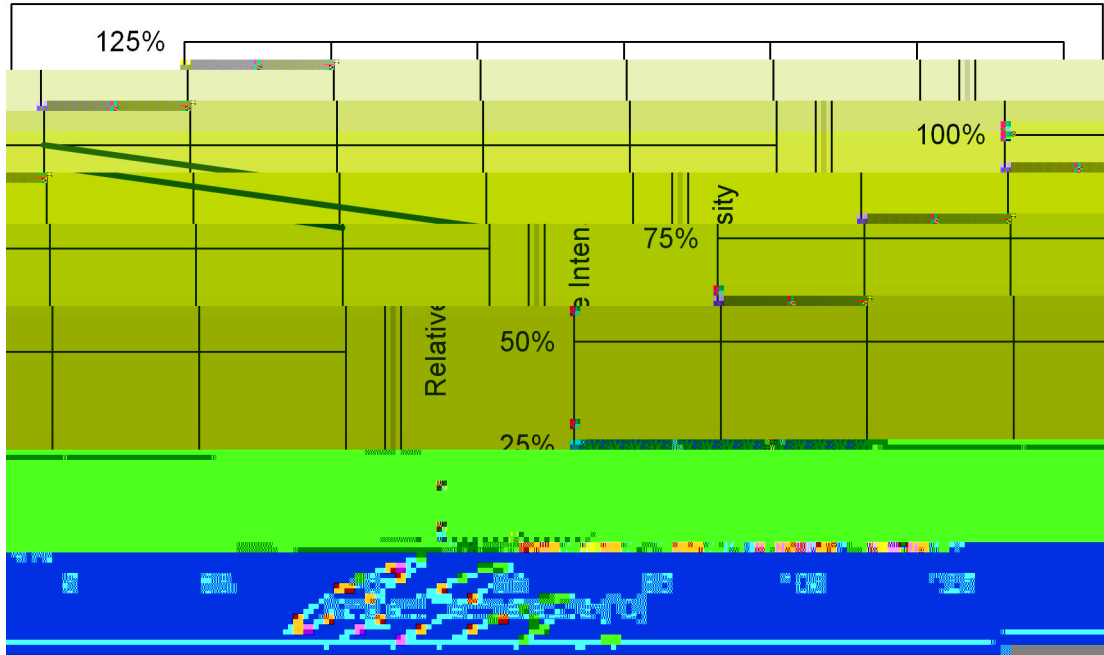


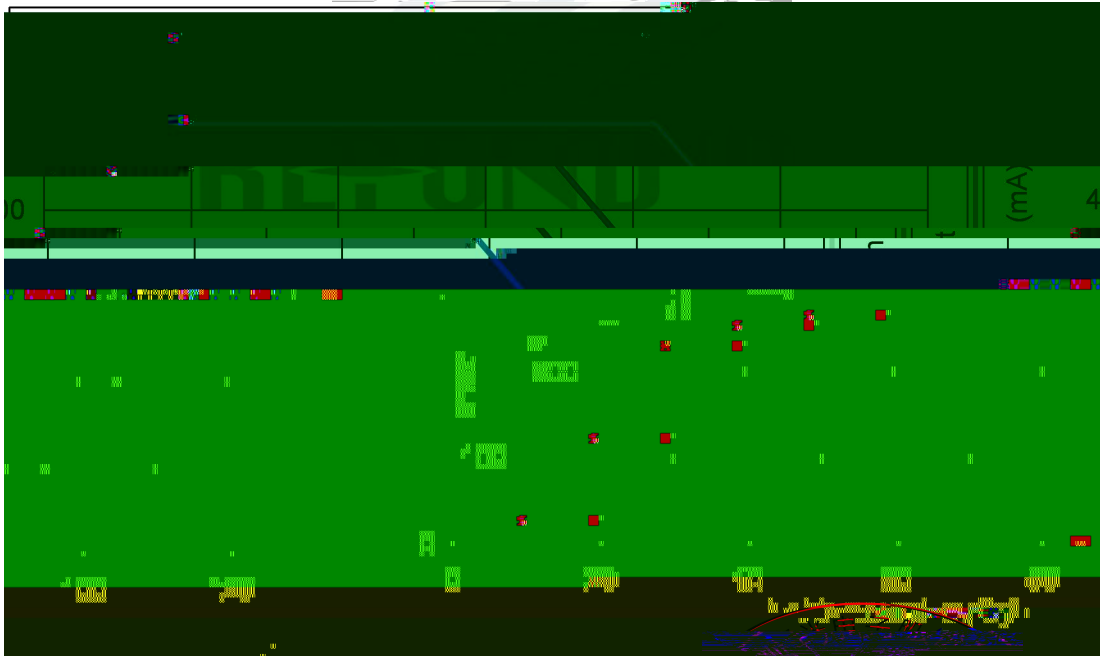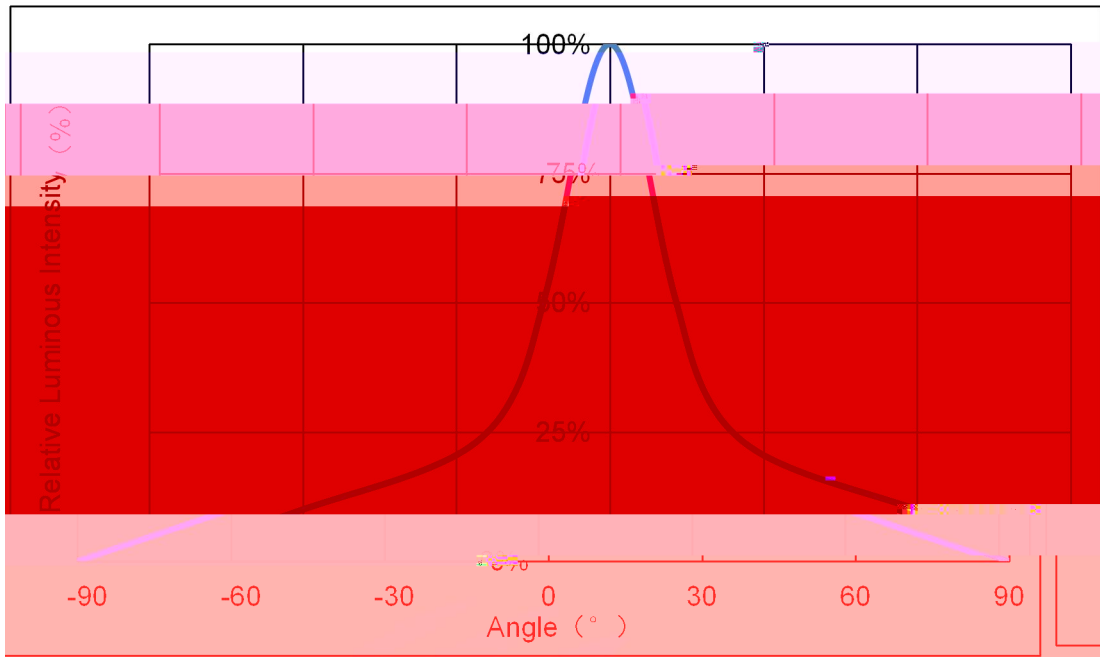

## 2. Packaging

### 2.1 Packaging Specification

2500

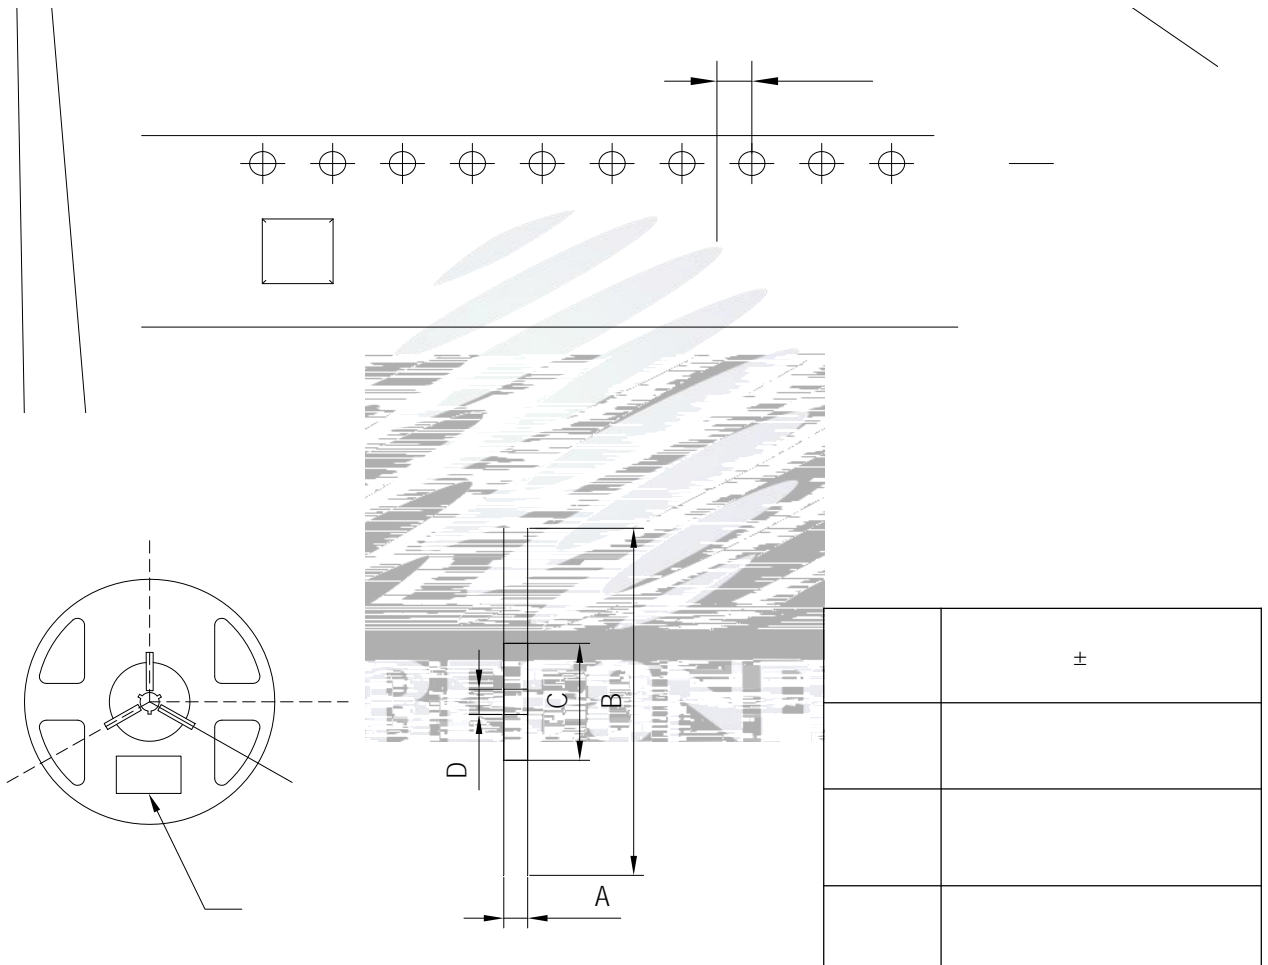

---

---

---

---

---


---

---

---



## 2.4 Reliability Test Items And Conditions

## 2.5 Criteria For Judging Damage

Luminous Flux				






°C

(2)



(1)





## 4. Handling Precautions

### 4.1 Handling Precautions

